

# Toe Jacks

5.5, 11 & 27.5 Ton

Get under equipment with only 27 mm of ground clearance.

JACKS




ASME B30.1

- With lifting points on the toe and on the top, these extremely rugged jacks are ideal for machine lifting, rigging, lift truck service and much more.
- Choose from 5.5-ton, 11-ton, and now, an amazing 27.5-ton lifting capacity.
- All jacks operate both vertically and horizontally.
- Base, toe and pumping assembly swivel independently, allowing the jack to work in confined areas.



The J Series Toe Jack is an extremely rugged jack used here for lift truck service.

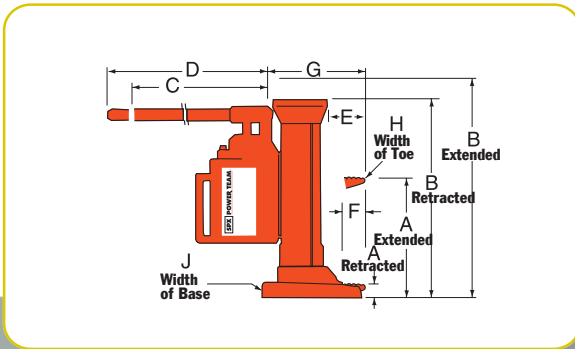

### DIMENSIONS

Order Number	A		B		C	D	E	F	G	H	J
	Ret. (mm)	Ext. (mm)	Ret. (mm)	Ext. (mm)							
<b>J58T</b>	30	238	375	584	368	451	71	56	176	41	130
<b>J109T</b>	30	264	419	654	368	451	76	56	183	64	171
<b>J259T</b>	54	289	505	738	210	756	146	102	267	89	270

### ORDERING INFORMATION

Cap. Tons	Max Lift Stroke (mm)	Order Number	Strokes to Extend Piston 25,4 mm	Handle Effort at Max Load (kg)	Carry Handle	Metric tons at 700 bar	Product Wt. (kg)
5 <sup>1</sup> / <sub>2</sub>	210	<b>J58T</b>	8	38,1	Yes	5,0	19,5
11	235	<b>J109T</b>	13	40	Yes	10,0	29
27 <sup>1</sup> / <sub>2</sub>	233	<b>J259T</b>	21	40	Yes	24,9	92,1